

3-24-00

A
PATENT

Attorney's. Docket No. 99-313

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Box Patent Application
Assistant Commissioner for Patents
Washington, D. C. 20231

NEW APPLICATION TRANSMITTAL

Transmitted herewith for filing is the patent application of:

Inventor(s): Eddie Huey Chiun Lin

For: SYSTEM AND METHOD FOR IMPROVING TRAFFIC
ANALYSIS AND NETWORK MODELING

Certification Under 37 CFR 1.10

I hereby certify that this New Application Transmittal and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date 3/23/00 in an envelope as "Express Mail Post Office to Addressee" mailing label EJ668095983US addressed to the: Assistant Commissioner for Patents, Washington, D.C. 20231.

Mary E. Anza

(typed or printed name of person mailing paper)

Mary E. Anza
(Signature of person mailing paper)


Attorney's Docket No. 99-313

Enclosed are:

[14] pages of specification and cover sheet
 [5] pages of claims
 [1] page of abstract
 [8] sheets of formal drawings.
 [2] pages of declaration and power of attorney.
 [2] pages of assignment and assignment recordation form
 [2] pages of information disclosure statement
 [1] page of form 1449
 [5] references
 [1] return postcard

CLAIMS AS FILED			
	NUMBER FILED	NUMBER EXTRA	BASIC FEE \$690.00
TOTAL CLAIMS	25 - 20	5 x	\$18.00
INDEPENDENT CLAIMS	7 - 3	4 x	\$78.00
MULTIPLE DEPENDENT CLAIMS(S)		0 x	\$260.00
TOTAL FILING FEE			\$1092.00

- [x] Please charge my Deposit Account No. 07-2339 in the amount of **\$1092.00.** **This transmittal letter is submitted in duplicate.**
- [x] The Commissioner is hereby authorized to charge any additional fees under 37 CFR 1.16 and 1.17 which may be required by the papers submitted herewith or credit any overpayment to Account No. 07-2339.
This transmittal letter is submitted in duplicate.



Floyd E. Anderson
Registration No. 33,825
Attorney for Applicant(s)

GTE Service Corporation
600 Hidden Ridge, HQE03G13
Irving, TX 75038
Phone: (781) 466-4016
Fax: (781) 466-4021

EXPRESS MAIL NO. EJ668095983US

PATENT

Attorney Docket No. 99-313

UNITED STATES PATENT APPLICATION

OF

Eddie Huey Chiun LIN

FOR

**SYSTEM AND METHOD FOR IMPROVING TRAFFIC
ANALYSIS AND NETWORK MODELING**

SYSTEM AND METHOD FOR IMPROVING TRAFFIC ANALYSIS AND NETWORK MODELING

FIELD OF THE INVENTION

The present invention relates generally to networks and, more particularly, to a
5 system and method for improving analysis and modeling of a data network.

BACKGROUND OF THE INVENTION

Cisco's Netflow software provides the capability to collect the source and
destination network prefixes of the traffic flows that pass through routers in the
network. However, knowing the source and destination network prefixes of the traffic
10 flows in a data network is typically insufficient for traffic analysis and network
modeling purposes.

To adequately analyze and model traffic traversing a data network, it is
important to be able to determine the autonomous system (AS) path from the source
network to the destination network, and the entry and exit routers within a data
15 network. When autonomous systems use Border Gateway Protocols (BGP) to
exchange routing information, the entry and exit routers within a data network are
equivalent to knowing the BGP next hop routers for the source and destination
network prefixes, respectively. Therefore, one can look up the entry and exit routers
from the BGP routing table using the source and destination network prefixes,
20 respectively.

However, depending on the routing architecture for a particular data network,
not all network prefixes may be in the BGP routing table, and therefore, it may not be
possible to determine the entry and/or exit routers using only the BGP routing table.

Therefore, there exists a need for a system and method that facilitate the
25 analysis of a communications network by allowing for identification of the entry and
exit routers for traffic flowing through a data network.

SUMMARY OF THE INVENTION

Systems and methods consistent with the present invention address this need by providing a mechanism by which a network designer can analyze a data network.

In accordance with the purpose of the invention as embodied and broadly described herein, a method includes accessing a static routing table and/or an OSPF route summarization table for identifying the entry and exit routers for source and destination network prefixes, respectively. Being able to identify the entry and exit routers for a traffic flow greatly improves the network designer's ability analyze and model the data network.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate an embodiment of the invention and, together with the description, explain the invention. In the drawings,

FIG. 1 illustrates an Internet in which a system and method, consistent with the present invention, may be implemented;

FIG. 2 illustrates an exemplary router configuration consistent with the present invention;

FIG. 3 illustrates an exemplary BGP routing table consistent with the present invention;

FIG. 4 illustrates an exemplary external BGP peering table consistent with the present invention;

FIG. 5 illustrates an exemplary static routing table consistent with the present invention;

FIG. 6 illustrates an exemplary open shortest path first (OSPF) route summarization table consistent with the present invention;

FIG. 7 illustrates an exemplary network topology table consistent with the present invention;

FIG. 8 illustrates an exemplary system upon which a system and method, consistent with the present invention, may be implemented; and

FIGS. 9A - 9C illustrate an exemplary process, consistent with the present invention, that improves network analysis and modeling.

DETAILED DESCRIPTION

The following detailed description of the invention refers to the accompanying drawings. The same reference numbers in different drawings identify the same or similar elements. Also, the following detailed description does not limit the invention. Instead, the scope of the invention is defined by the appended claims.

Systems and methods consistent with the present invention provide a process that improves analysis and modeling of a data network. The information provided by, for example, Cisco's NetFlow software by itself is not sufficient for traffic analysis and network modeling. For the information to be useful, one needs to know the autonomous system path a particular traffic flow takes to get from the source network to the destination network, and the entry and exit routers within the data network. In implementations consistent with the present invention, this information may be obtained based on the source and destination network prefixes of a traffic flow using the BGP routing table, external BGP peering table, static routing table, OSPF route summarization table, and network topology table.

The BGP routing table is obtained by downloading the output of the command "show ip bgp" from a router where the Netflow data was collected. In other words, the BGP routing table is specific to the router where the Netflow data was collected. The external BGP peering table, static routing table, OSPF route summarization table, and network topology table can be extracted and generated from the router configuration files of all the routers in the data network. In other words, these tables are not specific to the router where the Netflow data was collected, instead, the tables are specific to the data network where the router resides.

EXEMPLARY NETWORK

Within the context of this documentation, the words data network, routing domain, and autonomous system are used interchangeably.

FIG. 1 illustrates an exemplary Internet (or other similar type of network) 100 in which a system and method, consistent with the present invention, that improve analysis and modeling of a data network, such as tier one service provider (or data network) 112, may be implemented. In FIG. 1, Internet 100 includes several tier one
5 Internet service providers (ISPs) 112-116, tier two Internet service providers 122-126, and customers 131-136. Each ISP, whether it is a tier one ISP or a tier two ISP, has its own autonomous system number. Customers of the ISPs may or may not have their own autonomous system numbers. If the customers do not have their own autonomous system numbers, they are said to be part of the autonomous system of
10 their associated ISP.

The tier one ISPs 112-116 are large national ISPs. All the tier one ISPs exchange traffic with each other directly. This is known as peering. Every tier one ISP peers with every other tier one ISP.

The tier two ISPs 122-126 are regional ISPs or smaller ISPs that rely on a tier
15 one ISP to provide transit service. The tier two ISPs are generally connected to one or more tier one ISP.

Each routing domain functions independently from the other routing domains, but they may choose to cooperate with each other to deliver data. Different routing domains cooperate with each other by exchanging routing information using external
20 gateway protocols such as the Border Gateway Protocol (BGP). Within each routing domain, internal gateway protocols are used such as the Open Shortest Path First (OSPF) protocol.

Data originating from a source network may need to go through multiple autonomous systems before arriving at the destination network. For example, traffic
25 originated from customer 132 and destined to customer 133 may go through ISP 122, ISP 112, ISP 114, and ISP 124. In other words, traffic passing through a data network, ISP 112 for example, may come from a source network multiple autonomous systems away and may end up in a destination network several autonomous systems away.

30 Implementations consistent with the present invention provide a method by

which the entry and exit routers of a particular data network (e.g., data network 112) for a traffic flow (traffic flows are characterized by the source and destination network prefixes) may be identified whether the traffic flow originates from a source network multiple autonomous systems away and terminates in a destination network several
5 autonomous systems away.

EXEMPLARY ROUTER CONFIGURATION

FIG. 2 illustrates an exemplary router 200 consistent with the present invention. The router 200 includes a routing engine 210, having a processor 212, a database 214, and one or more routing tables 216, and an interface 220.

10 The processor 212 may be any type of conventional processing device. The processor 212 determines the path on which a received packet is to be routed through a network, such as network 100, toward its ultimate destination based on information contained in the database 214 and routing tables 216.

The database 214 may include any type of conventional storage device. The
15 database 214 stores information that aids in the routing of packets and the identification of alternate paths. Database 214 may include one or more conventional databases, such as a Link State Database, a PATHS Database, and a Forwarding Database.

The routing tables 216 may include any type of conventional storage device.
20 A routing table 216, consistent with the present invention, may include a BGP routing table and a static routing table.

The interface 220 may include any type of conventional interface that provides a physical connection between the routing engine 210 and the network 100. A single interface 220 is illustrated for clarity. A particular router 200 may, in practice, include
25 multiple interfaces 220 coupled to multiple networks. Moreover, a particular router 200 may include additional devices (not shown) that aid in the receiving, transmitting, and processing of information received at the router.

EXEMPLARY ROUTING TABLES

FIGS. 3-7 illustrate exemplary tables, consistent with the present invention, that may be used in network analysis and modeling. FIG. 3 illustrates an exemplary BGP routing table 300 consistent with the present invention. The BGP routing table 300 contains the best BGP route for each of the network prefixes learned via BGP.

The BGP routing table 300 includes a network prefix field 310, a BGP next hop's address field 320, and an autonomous system path field 330. The network prefix field 310 stores a network prefix. The BGP next hop's address field 320 stores the address of the router that advertises the prefix in the network prefix field 310. The autonomous system (AS) path field 330 stores a sequence of autonomous systems that a particular data packet needs to traverse in order to reach its final destination network. For example, a sequence may be represented by 701 7260 10656, where each group of numbers (e.g., 701) identifies an autonomous system. In order to reach the destination network, therefore, the packet needs to travel through Autonomous System 701, then through Autonomous System 7260, and finally through Autonomous System 10656. Table 1 illustrates an exemplary entry of a BGP routing table 300.

TABLE 1

Network Prefix	BGP Next Hop	AS Path
12.2.97.0/24	137.39.23.89	701 7260 10656

FIG. 4 illustrates an exemplary external BGP peering table 400 consistent with the present invention. The external BGP peering table 400 contains peering information for each of the external BGP neighbors. The external BGP peering table 400 includes an external BGP neighbor's autonomous system number field 410, an external BGP neighbor's address field 420, a peering router field 430, a peering interface field 440, and a peering interface address field 450.

The external BGP neighbor's autonomous system number field 410 stores the autonomous system number to which the external BGP neighbor belongs. The external BGP neighbor's address field 420 stores the address of the external BGP

neighbor. The peering router field 430 stores the identity of the router, in our autonomous system, that exchanges external BGP routing information with the external BGP neighbor. The peering interface field 440 stores the identity of the interface of the peering router in the peering router field 430 that the peering router
 5 uses to reach the external BGP neighbor. The peering interface address field 450 stores the address of the peering interface identified in the peering interface field 440. Table 2 illustrates an exemplary entry in a BGP peering table 400.

TABLE 2

External BGP Neighbor's AS Number	External BGP Neighbor's Address	Peering Router	Peering Interface	Peering Interface Address
701	137.39.23.89	boston1-br2	POS8/0/0	137.39.23.90

FIG. 5 illustrates an exemplary static routing table 500 consistent with the present invention. The static routing table 500 contains information related to where and how the static routes are configured in the data network. The static routing table 500 includes a network prefix field 510, a static route configured field 520, an exit interface field 530, and an exit interface address field 540.

The network prefix field 510 stores a network prefix. The static route configured field 520 stores the identity of the router where the static route for the network prefix identified in the network prefix field 510 is configured. The exit interface field 530 stores the identity of the interface of the configured router identified in the static route configured field 520 that the configured router uses to
 20 send data for the network prefix specified in the network prefix field 510. The exit interface address field 540 stores the address of the exit interface identified in field 530. Table 3 illustrates an exemplary entry of a static routing table 500.

TABLE 3

Network Prefix	Static Route Configured	Exit Interface	Exit Interface Address
4.21.227.0/24	atlanta1-cr1	hssi3/0	4.0.128.245

FIG. 6 illustrates an exemplary OSPF route summarization table 600 consistent with the present invention. The OSPF route summarization table 600 contains information related to where and how the OSPF route summarizations are configured within the data network. The OSPF route summarization table 600 includes a network prefix field 610 and a route summarization configured field 620.

The network prefix field 610 stores a network prefix. The route summarization configured field 620 stores the identity of the router where the OSPF route summarization is configured for the network prefix identified in the network prefix field 610. Table 4 illustrates an exemplary entry in an OSPF route summarization table 600.

TABLE 4

Network Prefix	Route Summarization Configured
207.240.16.0/21	laxcolo-border1

FIG. 7 illustrates an exemplary network topology table 700 consistent with the present invention. The network topology table 700 contains information for every interface of every router within the data network. The network topology table 700 includes a router field 710, an interface field 720, an address field 730, and a network prefix field 740.

The router field 710 stores the identity of a router in the data network. The interface field 720 stores the identity of an interface of the router identified in the router field 710. The address field 730 stores the address of the interface identified in the interface field 720. The network prefix field 740 stores the network prefix of the

network to which the interface in the interface field 720 is connected. Table 5 illustrates an exemplary entry of a network topology table 700.

TABLE 5

Router	Interface	Address	Network Prefix
atlanta1-cr1	hssi3/0	4.0.128.245	4.0.128.244/30

EXEMPLARY SYSTEM

5 FIG. 8 illustrates an exemplary system upon which a system and method, consistent with the present invention, may be implemented. In FIG. 8, the exemplary system 800 includes a processor 802, a main memory 804, a read only memory (ROM) 806, a storage device 808, a bus 810, a display 812, a keyboard 814, a cursor control 816, and a communication interface 818.

10 The processor 802 may be any type of conventional processing device that interprets and executes instructions. Main memory 804 may be a random access memory (RAM) or a similar dynamic storage device. Main memory 804 stores information and instructions for executing by processor 802. Main memory 804 may also store temporary variables or other intermediate information used during
15 execution of instructions by processor 802. ROM 806 stores static information and instructions for processor 802. ROM 806 may be replaced with some other type of static storage device. The storage device 808 may include any type of magnetic or optical disk and its corresponding disk drive. Storage device 808 may store information and instructions for use by processor 802. Bus 810 includes a set of
20 hardware lines (conductors) that allows for data transfer among the components of the system 800.

The display device 812 may be a cathode ray tube (CRT), or the like, for displaying information to an operator. The keyboard 814 and cursor control 816 allow the operator to interact with the system 800. The cursor control 816 may include, for
25 example, a mouse, a pen, voice recognition and/or biometric mechanisms, and the like.

Communication interface 818 enables the system to communicate with other

devices/systems via any communications medium. For example, communication interface 818 may be a modem or an Ethernet interface to a local area network (LAN).

Alternatively, communication interface 818 may be any other interface that enables communication between the system 800 and other devices or systems.

5 The system 800 performs the functions necessary to model and analyze a network in response to processor 802 executing sequences of instructions contained in, for example, memory 804. Such instructions may be read into memory 804 from another computer-readable medium, such as data storage device 808, or from another device via communication interface 818. Execution of the sequences of instructions
10 contained in memory 804 causes processor 802 to perform a method that will be described hereafter. Alternatively, hardwired circuitry may be used in place of or in combination with software instructions to implement the present invention. Thus, the present invention is not limited to any specific combination of hardware circuitry and software.

15 EXEMPLARY PROCESS

FIGS. 9A - 9C illustrate an exemplary process, consistent with the present invention, that improves network modeling and analysis. The system 800 determines the identity of the entry and exit routers in an autonomous system using the source and destination network prefixes, the BGP routing table, the external BGP peering table, the static routing table, the OSPF route summarization table, and the network topology table.

To determine the BGP next hop's address and the autonomous system path for a network prefix, the system 800 accesses the BGP routing table 300 [step 902]. The system 800 determines whether the network prefix is in the network prefix field 310 of the BGP routing table 300 [step 904]. If the network prefix is in the network prefix field 310, the system 800 sets the BGP next hop's address to the corresponding address in the BGP next hop address field 320 of the BGP routing table 300. The system 800 also sets the autonomous system (AS) path to the corresponding autonomous system path in the autonomous system path field 330 of the BGP routing

table 300 [step 906].

The system 800 then accesses the external BGP peering table 400 [step 908]. To determine the identity of the BGP next hop's address (i.e., router identity, interface identity, and association), the system 800 determines whether the BGP next hop's address is in the BGP neighbor's address field 420 of the external BGP peering table 400 [step 910]. If the address is in the BGP neighbor's address field 420, the system 800 sets the router identity to the corresponding identity in the peering router field 430, sets the interface identity to the corresponding identity in the peering interface field 440, and sets the association as "BGP" to signify that the identity is determined by the external BGP peering table 400 [step 912].

If the BGP next hop's address is not in the BGP peering table 400, the system 800 accesses the network topology table 700 [step 914]. The system 800 determines whether the BGP next hop's address is in the address field 730 in the network topology table 700 [step 916]. If the BGP next hop's address is in the address field 730, the system 800 sets the router identity to the corresponding identity in the router field 710, sets the interface identity to the corresponding identity in the interface field 720, and sets the association as "TOPOLOGY" to signify that the identity is determined by the network topology table 700 [step 918].

If the BGP next hop's address is not in the network topology table 700, the system 800 sets the router identity, the interface identity, and the association as "UNKNOWN" [step 920].

If, in step 904, the system 800 determines that the network prefix is not in the network prefix field 310 of the BGP routing table 300, the system 800 sets the BGP next hop's address as "not applicable" to indicate that the network prefix is not in the BGP routing table 300 [step 922 - FIG. 9B]. The system 800 then accesses the static routing table 500 [step 924]. The system 800 determines whether the identity (i.e., router identity, interface identity, and association) of the network prefix is in the static routing table 500 [step 926]. If network prefix is in the network prefix field 510 of the static routing table 500, the system 800 sets the router identity to the corresponding identity in the static route configured field 520, sets the interface to the corresponding

identity in the exit interface field 530, and sets the association as "STATIC" to signify that the identity is determined by the static routing table [step 928]. The system 800 also sets the autonomous system path to the autonomous system number of our autonomous system (i.e., the autonomous system being analyzed, such as autonomous system 112 in FIG. 1) [step 930].

If the network prefix is not in the static routing table 500, the system 800 accesses the OSPF route summarization table 600 [step 932]. The system 800 determines whether the network prefix is in network prefix field 610 of the OSPF route summarization table 600 [step 934]. If network prefix is in the network prefix field 610, the system 800 sets the router identity to the corresponding identity in the route summarization configured field 620, sets the interface identity to "not applicable," and sets the association as "SUMMARIZATION" to signify that the identity is determined by the OSPF route summarization table 600 [step 936]. The system 800 also sets the autonomous system path to the autonomous system number of our autonomous system [step 938].

If the network prefix is not in the OSPF route summarization table 600, the system 800 accesses the network topology table 700 [step 940]. The system 800 determines whether the network prefix is in the network prefix field 740 of the network topology table 700 [step 942]. If the network prefix is in the network prefix field 740, the system 800 sets the router identity to the corresponding identity in the router field 710, sets the interface identity to the corresponding identity in the interface field 720, and sets the association as "TOPOLOGY" to indicate that the identity is determined by the network topology table 700 [step 944 - FIG. 9C]. The system 800 also sets the autonomous system path to the autonomous system number of our autonomous system [step 946].

If the network prefix is not in the static routing table 500, the OSPF route summarization table 600, or the network topology table 700, the system 800 sets the router identity, interface identity, and association as "UNKNOWN" [step 920].

Once the identity of the network prefix has been determined, the system 800 analyzes the network using the determined identity [step 948]. The system 800 may,

for example, use the identity for traffic analysis or modeling of the network.

It is evident that from a network prefix, whether it is a source or destination prefix, the system 800 is capable of determining the BGP next hop's address, router identity, interface identity, association, and autonomous system path associated with the network prefix. The router identities associated with the source and destination network prefixes are the entry and exit routers, respectively, in our autonomous system (i.e., the autonomous system being analyzed) for that particular traffic flow. The autonomous system paths associated with the source and destination network prefixes are the sequences of autonomous systems from the source network to the destination network. This information facilitates network analysis and modeling.

CONCLUSION

Systems and methods consistent with the present invention provide a mechanism that improves analysis of a data network. In implementations consistent with the present invention, a system extracts and generates static routing information and/or the Open Shortest Path First (OSPF) route summarization information from a router's configuration files to determine the entry and exit routers within a data network for the source and destination network prefixes, respectively, of a traffic flow. This information can then be used to analyze and model the network.

The foregoing description of exemplary embodiments of the present invention provides illustration and description, but is not intended to be exhaustive or to limit the invention to the precise form disclosed. Modifications and variations are possible in light of the above teachings or may be acquired from practice of the invention. For example, while a series of steps have been presented with respect to FIGS. 9A to 9C, the order of the steps does not matter.

The scope of the invention is defined by the following claims and their equivalents.

WHAT IS CLAIMED IS:

1. A method for analyzing a data network having a plurality of routers comprising:
 - accessing at least one of static routing information and route summarization information;
 - 5 determining an identity of a network prefix using the accessed information; and
 - analyzing the data network using the determined identity.
2. The method of claim 1 wherein the accessing includes:
 - accessing at least one of a static routing table and an open shortest path first route summarization table.
3. The method of claim 1 wherein the determining includes:
 - determining router information, interface information, and association information for the network prefix.
4. The method of claim 1 wherein the analyzing includes:
 - analyzing traffic of the data network.
5. The method of claim 1 wherein the analyzing includes:
 - modeling the data network.
6. The method of claim 1 wherein the determining includes:
 - determining an identity of an exit or entry router in the data network.
7. A system for analyzing a data network having a plurality of routers, said system comprising:

means for accessing at least one of static routing information and route summarization information;

5 means for determining an identity of a network prefix using the accessed information; and

means for analyzing the data network using the determined identity.

8. A system for analyzing a data network, said system comprising:

a memory configured to store information representing static routing information and route summarization information; and

a processor configured to:

5 access at least one of the static routing information and the route summarization information;

determine an identity of a network prefix using the accessed information; and

analyze the data network using the determined identity.

9. The system of claim 8 wherein, when accessing, the processor is configured to:

access at least one of a static routing table and an open shortest path first route summarization table.

10. The system of claim 8 wherein, when determining, the processor is configured to:

determine router information, interface information, and association information for the network prefix.

11. The system of claim 8 wherein, when analyzing, the processor is configured to:

analyze traffic of the data network using the determined identity.

12. The system of claim 8 wherein, when analyzing, the processor is configured to:

model the data network using the determined identity.

13. The system of claim 8 wherein, when determining, the processor is configured to:

determine an identity of an exit or entry router in the data network.

14. A computer-readable medium containing instructions for controlling at least one processor to perform a method that analyzes a data network having a plurality of routers, the method comprising:

5 accessing at least one of static routing information and route
summarization information from a router;
 determining an identity of a network prefix using the accessed
information; and
 analyzing the data network using the determined identity.

15. The computer-readable medium of claim 14 wherein the accessing includes:

accessing at least one of a static routing table and an open shortest path first route summarization table.

16. The computer-readable medium of claim 14 wherein the determining includes:

determining router information, interface information, and association information for the network prefix.

17. The computer-readable medium of claim 14 wherein the analyzing includes:

analyzing traffic of the data network.

18. The computer-readable medium of claim 14 wherein the analyzing includes:

modeling the data network.

19. The computer-readable medium of claim 14 wherein the determining includes:

determining an identity of an exit or entry router in the data network.

20. A method for determining an identity of a network device, the network device being associated with a network prefix, the method comprising:

accessing one or more of a border gateway protocol peering table, a static route table, an open shortest path first route summarization table, and a network topology table;

determining whether one of the accessed tables contains the network prefix; and

determining an identity of the network device when a table is determined to contain the network prefix.

21. The method of claim 20 wherein the determining an identity includes:

determining router information, interface information, and association information.

22. A system for determining an identity of a network device, the network device being associated with a network prefix, the system comprising:

a memory configured to store one or more of a border gateway protocol peering table, a static route table, an open shortest path first route summarization table, and a network topology table; and

a processor configured to:

access, from the memory, one or more of the border gateway

protocol peering table, the static route table, the open shortest path first route summarization table, and the network topology table;

10 determine whether one of the accessed tables contains the network prefix; and

 determine an identity of the network device when a table is determined to contain the network prefix.

23. The system of claim 22 wherein, when determining an identity, the processor is configured to:

 determine router information, interface information, and association information.

24. A computer-readable medium containing instructions for controlling at least one processor to perform a method that determines an identity of a network device, the network device being associated with a network prefix, the method comprising:

5 accessing, from a router, one or more of a border gateway protocol peering table, a static route table, an open shortest path first route summarization table, and a network topology table;

 determining whether one of the accessed tables contains the network prefix; and

10 determining an identity of the network device when a table is determined to contain the network prefix.

25. The computer-readable medium of claim 24 wherein the determining an identity includes:

 determining router information, interface information, and association information.

ABSTRACT

A system (800) improves a network designer's ability to analyze a data network having several routers. The system (800) accesses static routing information and/or open shortest path first route summarization information, determines an identity of a network prefix using the accessed information, and analyzes the data network using the determined identity. The network designer can use this determined identity for traffic analysis or modeling of the data network.

5

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2

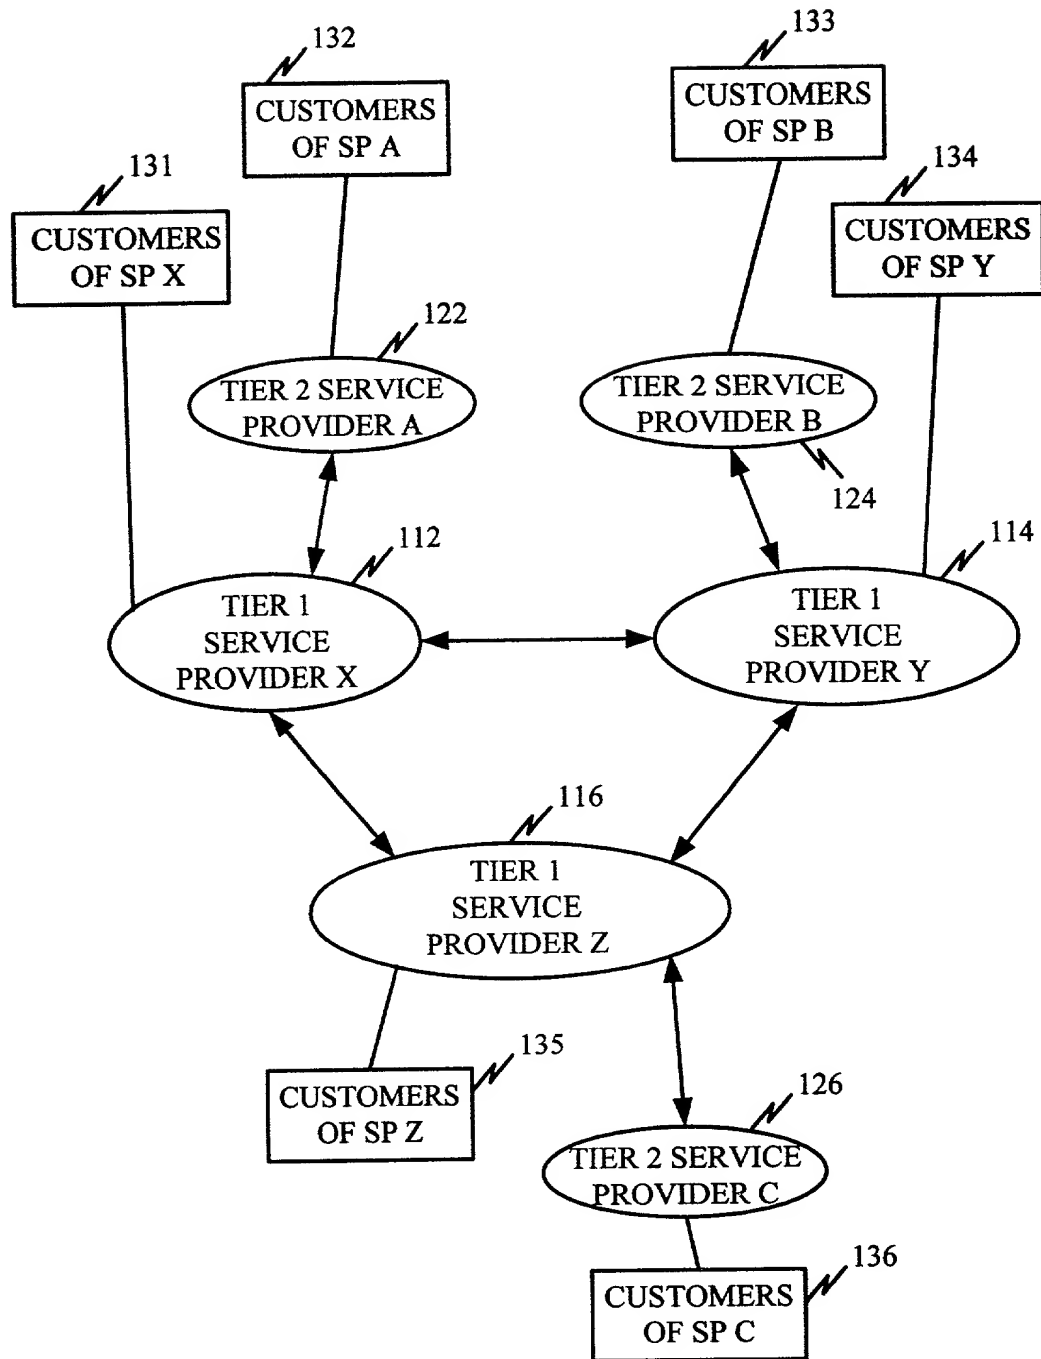


FIG. 1

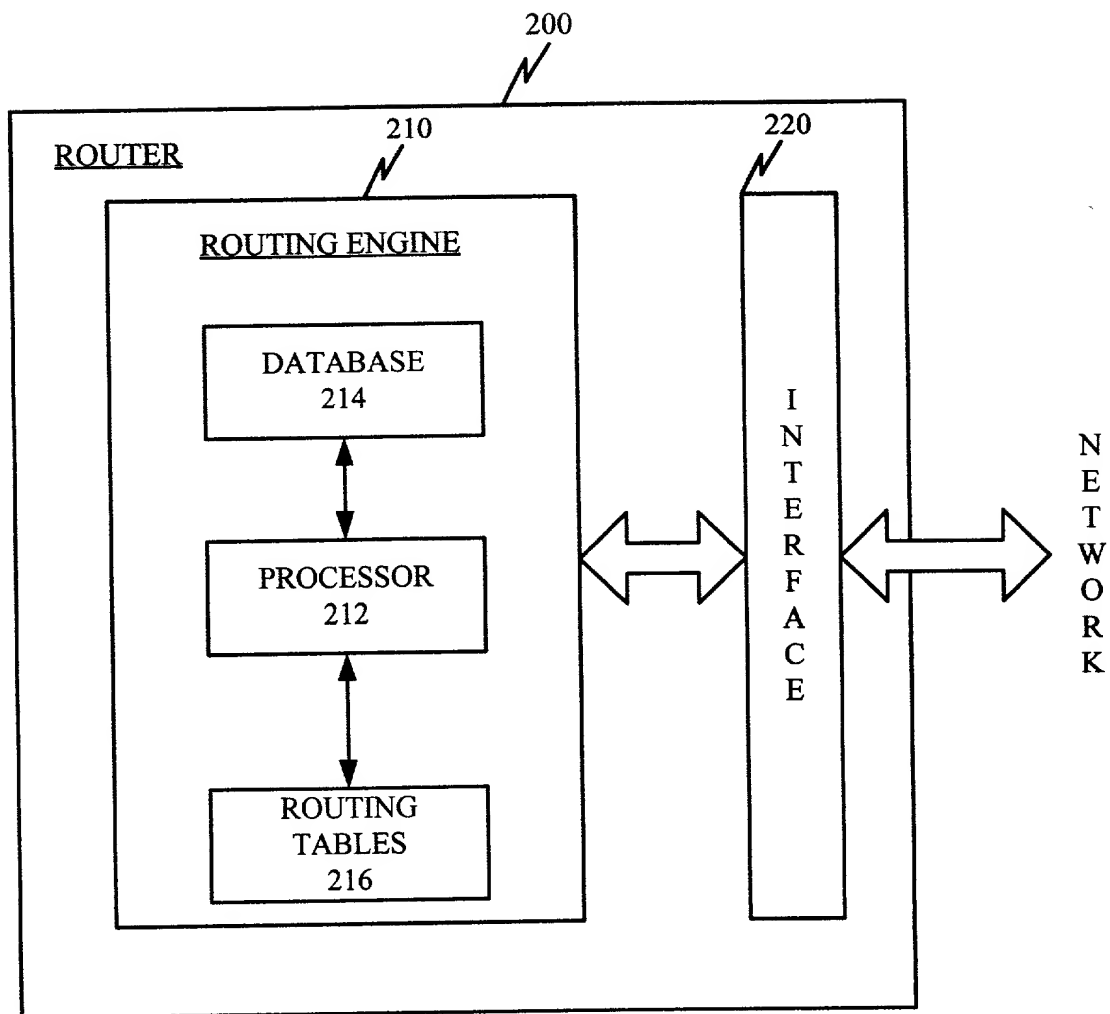


FIG. 2

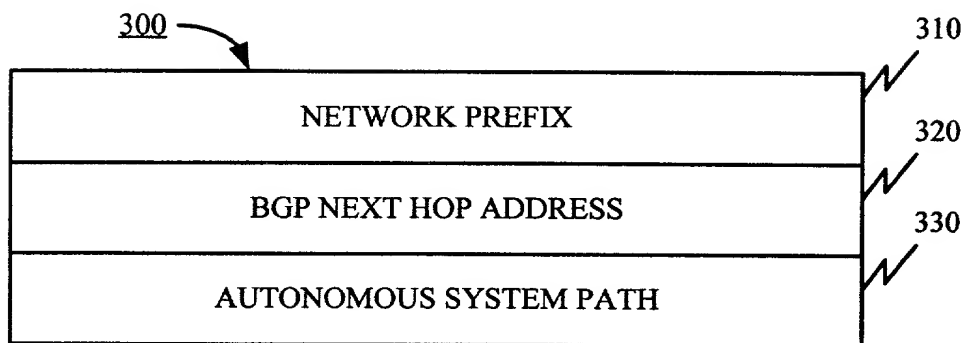


FIG. 3

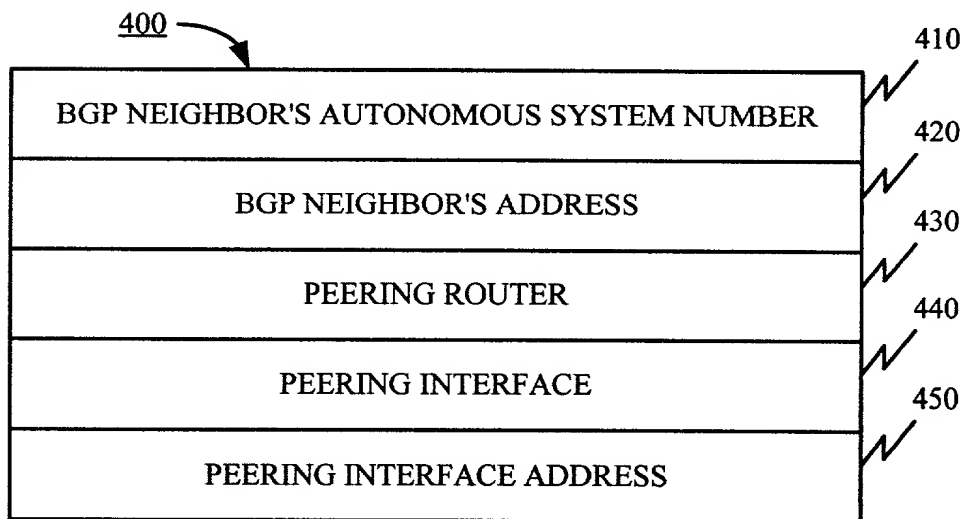


FIG. 4

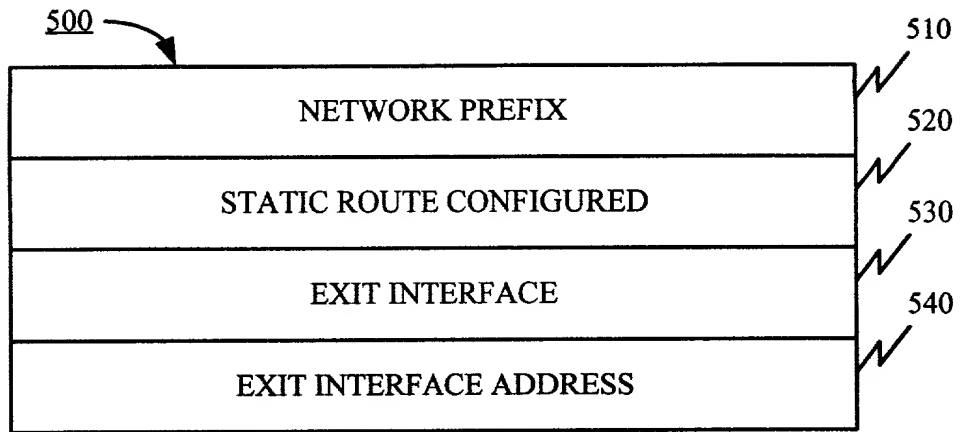


FIG. 5

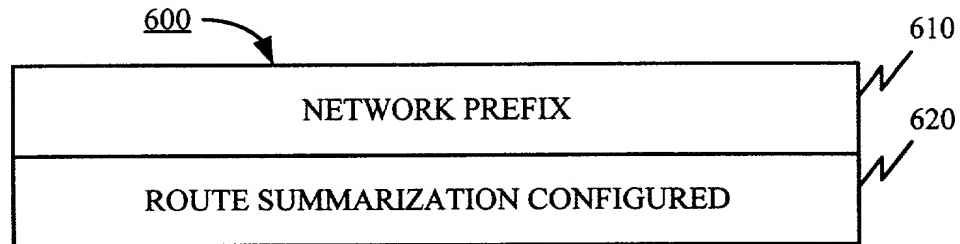


FIG. 6

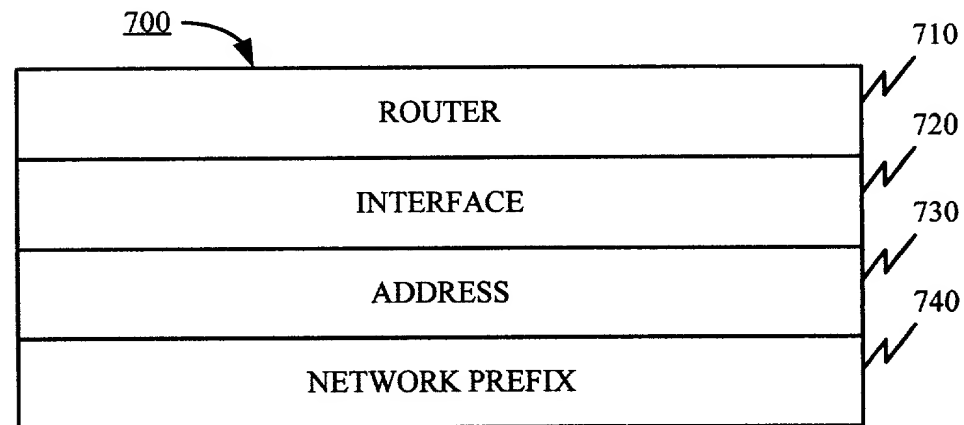


FIG. 7

800

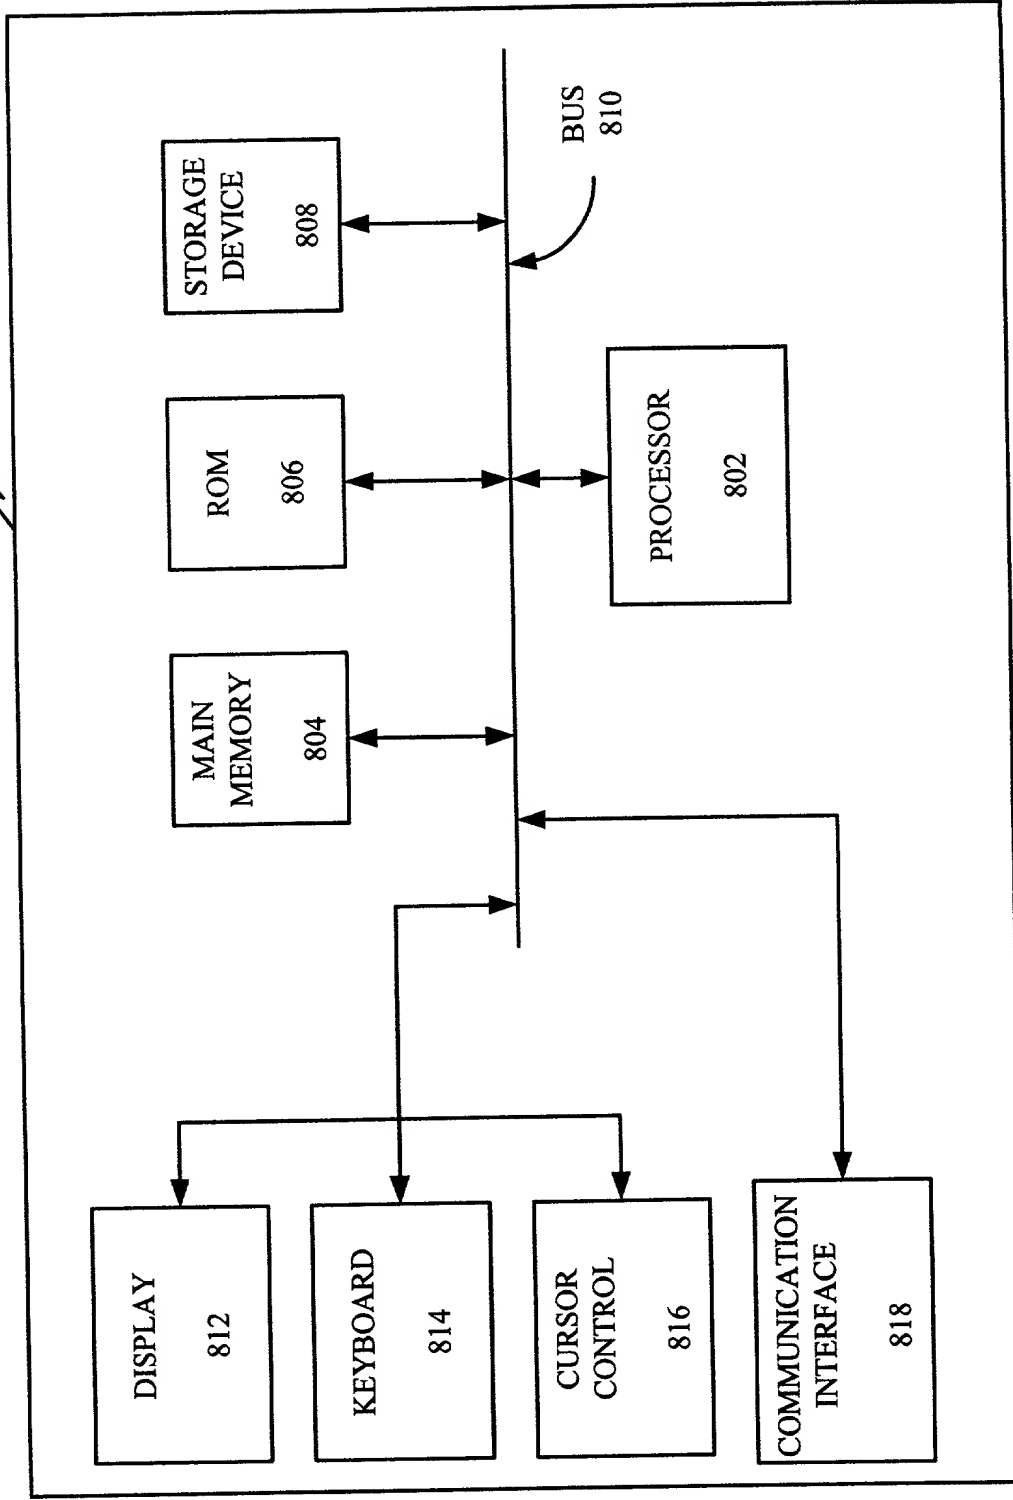


FIG. 8

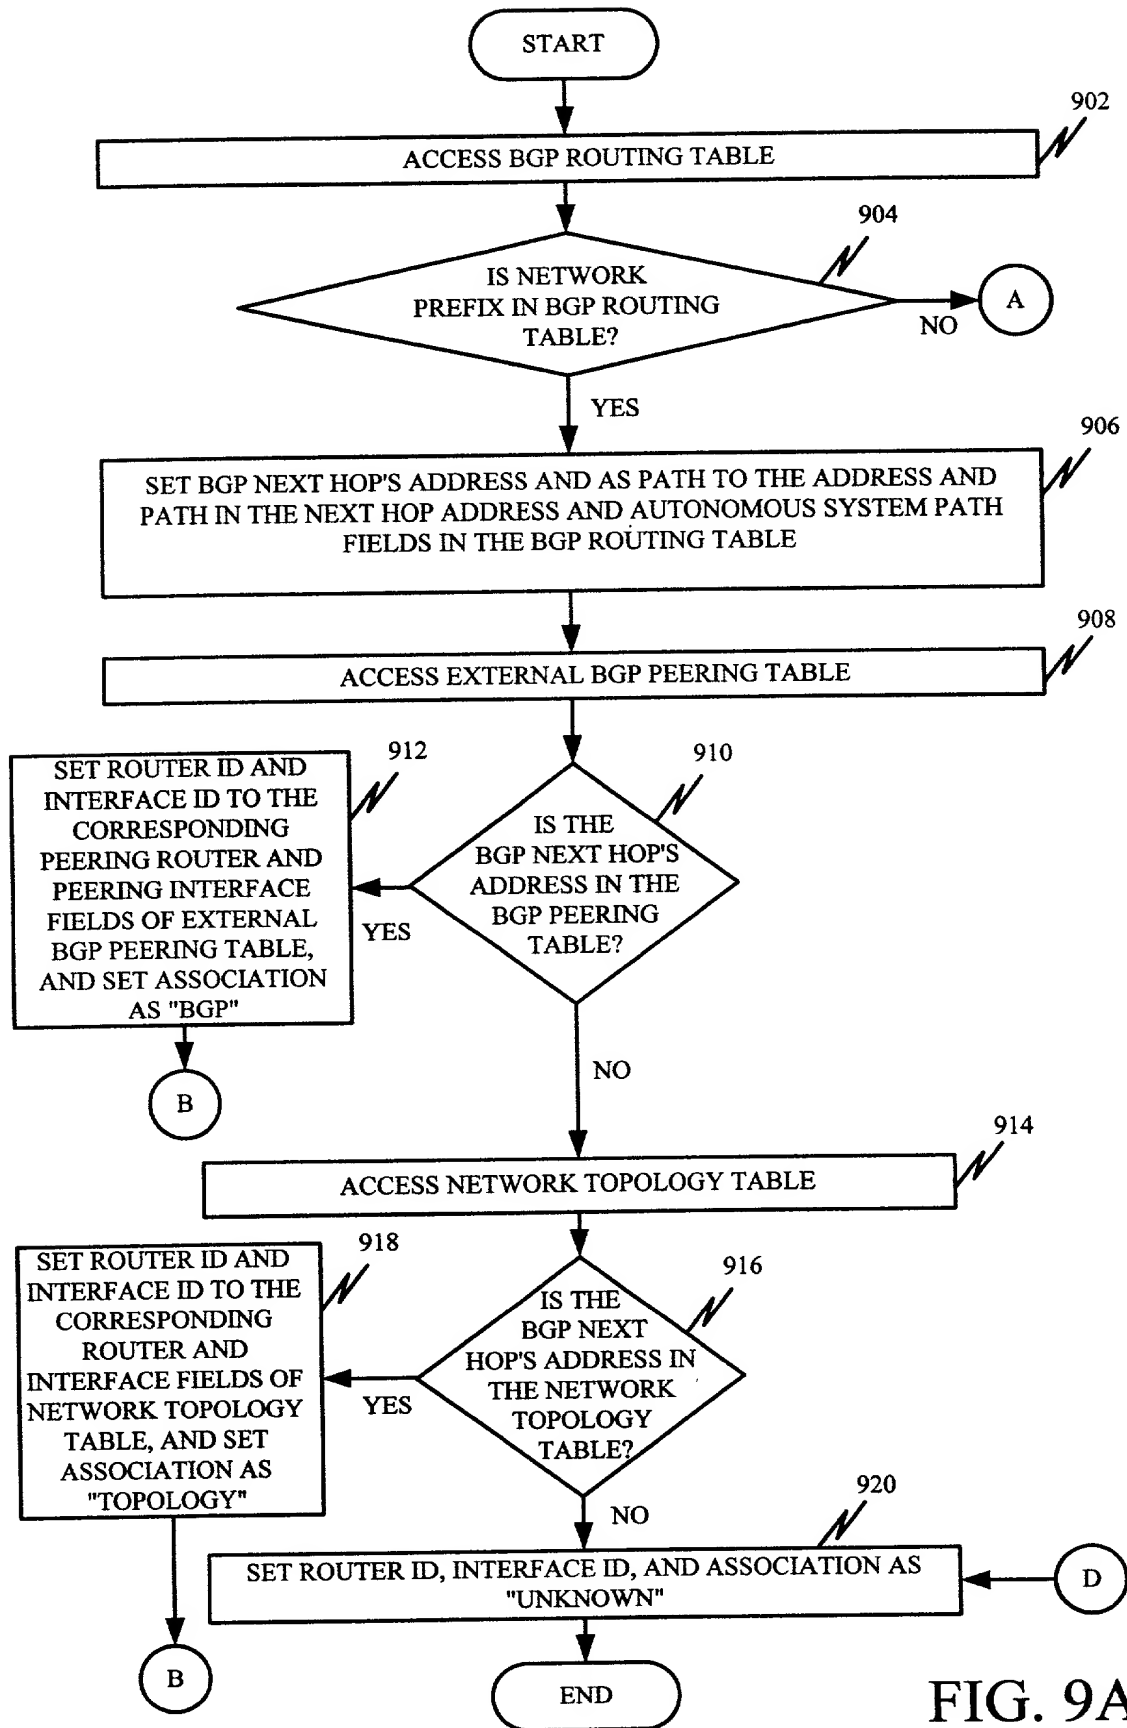


FIG. 9A

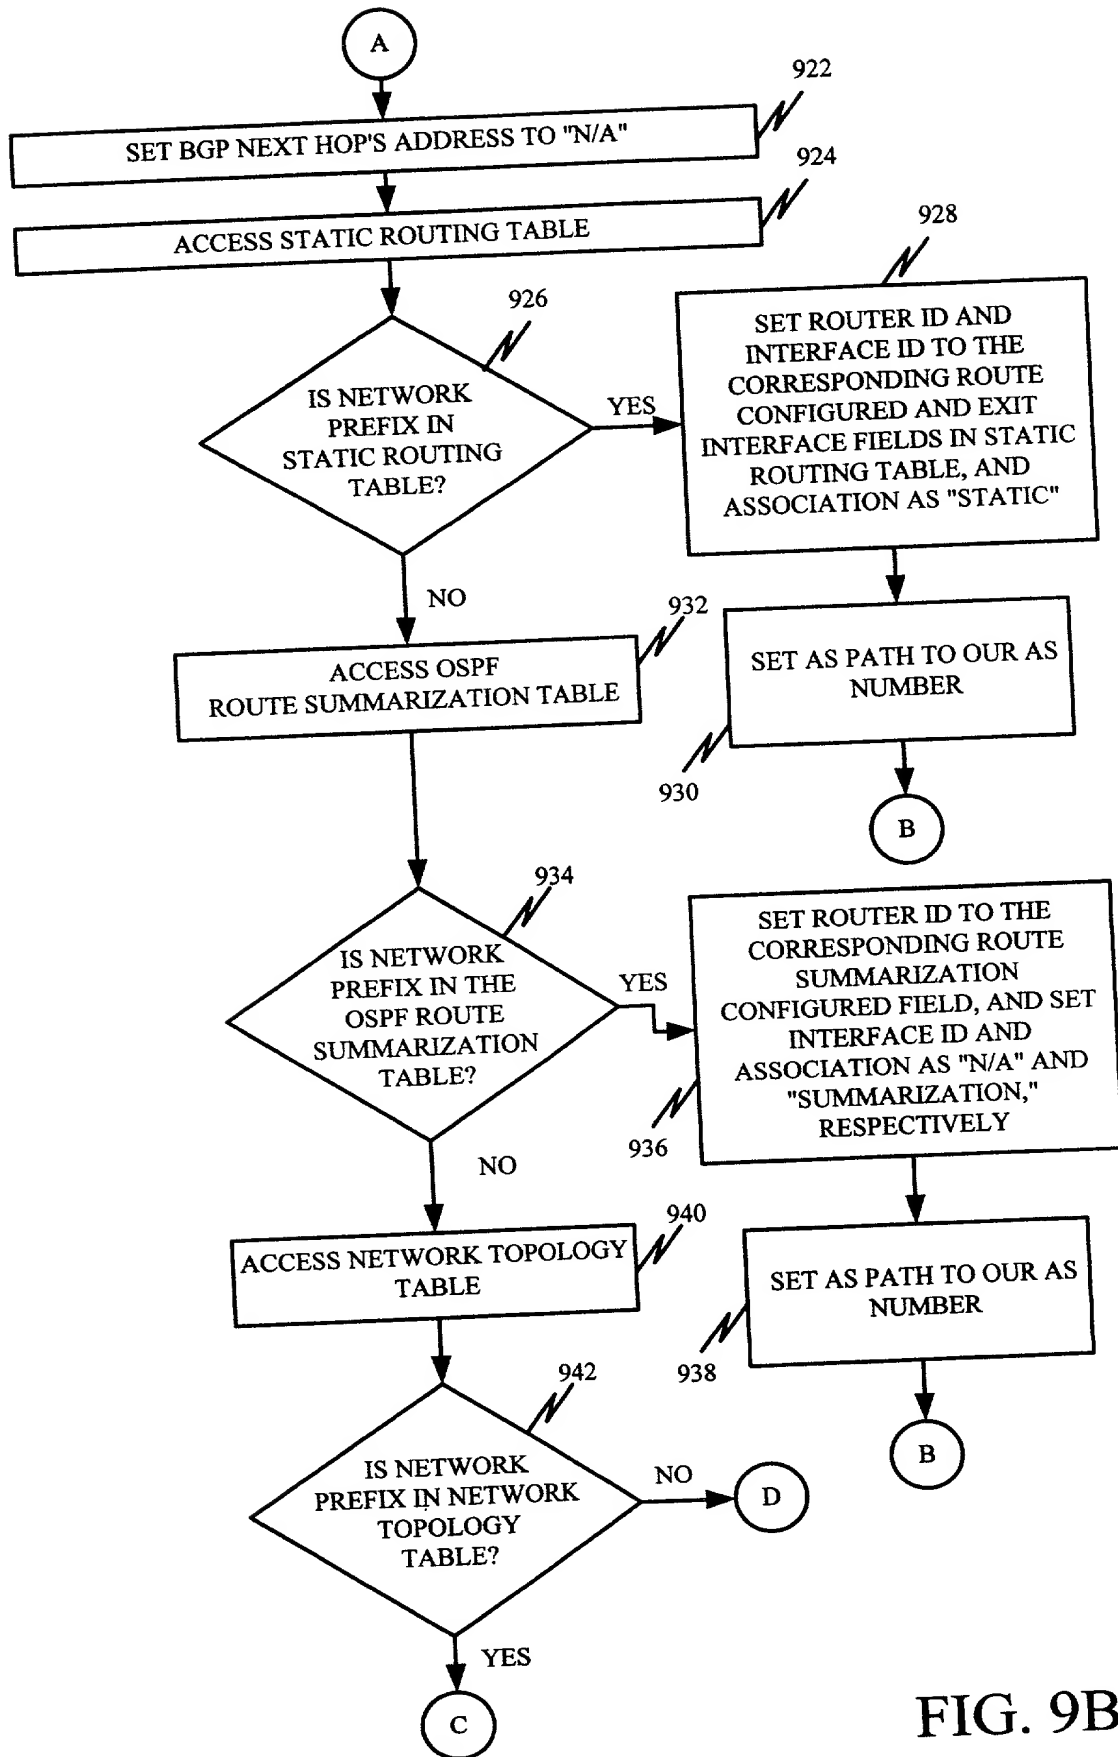


FIG. 9B

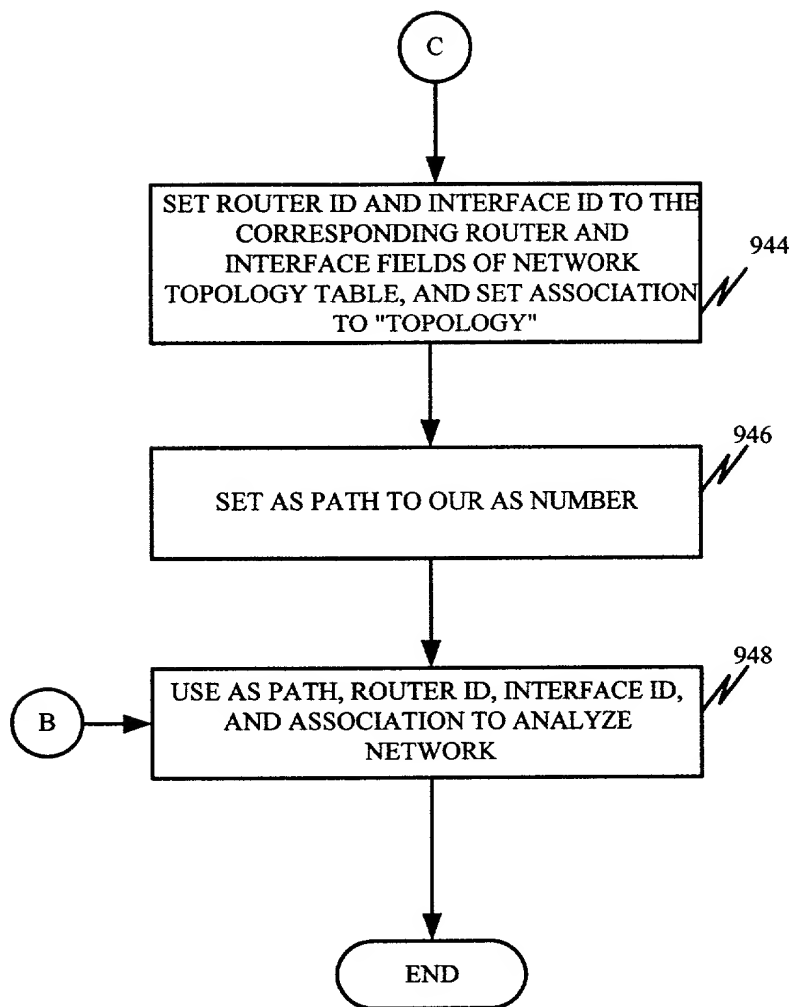


FIG. 9C

**DECLARATION AND POWER OF ATTORNEY FOR PATENT
APPLICATION**

Attorney Docket No. 99-313

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**SYSTEM AND METHOD FOR IMPROVING TRAFFIC ANALYSIS
AND NETWORK MODELING**

the specification of which (check one) ☒ [X] is attached hereto. ☐ [] was filed on
as Appln. Serial No. _____ and was amended on
(if applicable). I hereby state that I have reviewed and understand the contents of the above identified
specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application
in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign
application(s) for patent or inventor's certificate listed below and have also identified any foreign
application for patent or inventor's certificate having a filing date before that of the application on
which priority is claimed:

Prior Foreign Application(s)

Priority Claimed
[☐] Yes [☐] No

(Number)

(Country)

(Day/Month/Year filed)

I hereby claim the benefit under Title 35, United States Code, 119(e) of any United States provisional
applications(s) listed below.

(Application Number)

(Filing Date)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States
application(s) listed below and insofar as the subject matter of each of the claims of this application is
not disclosed in the prior United States application in the manner provided by the first paragraph of Title
35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined
in Title 37, Code of Federal Regulations, Section 1.56 which occurred between the filing date of the
prior application and the national or PCT international filing date for this application:

(Appln. Serial No.)

(Filing Date)

(Status--patented, pending, abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Leonard C. Suchyta, Reg. No. 25,707, Floyd E. Anderson, Reg. No. 33,825 and W. Eric Webostad, Reg. No. 35,406

Address all telephone calls to Floyd E. Anderson at telephone no. (781) 466-4016

Address all correspondence to Leonard C. Suchyta
GTE Service Corporation
600 Hidden Ridge, HQE03G13
Irving, TX 75038

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR Eddie Huey Chiun Lin

Inventor's signature Eddie Huey Chiun Lin Date 3/21/2000

Residence Winchester, Massachusetts Citizenship USA

Post Office Address 19 Oak St., Winchester, MA 01890